FLEX™ Control Panel

Three Phase Duplex, Type 4X (Indoor/Outdoor)
Model: FLXC3D | 208/230/460VAC or 230/460/575VAC; Specified Amp Ranges
CLEAR DOOR and LOCKABLE LATCHES

Alderon™ INDUSTRIES

MARKETING DATA FLIER



Panel Options (customize application)

- Current Sensors (displays and monitors Amps)
- Anti-Condensation Heater
- Main Disconnect
- Lightning Arrestor
- Intrinsically Safe Circuits
- Vizzy.Site™ Remote Monitoring

STANDARD FEATURES

- **Type 4X Enclosure, Indoor or Outdoor, Pad-Lockable**
  - Standard Enclosure Size 14" x 12" x 6" (inches)
  - Clear Door, View OLED Screen with Alarm and Status Indicator LEDs
  - Alarm Buzzer and Alarm Test/Silence Switch
- **Pump Motor Protective Switches (MPS) and IEC Contactors**
  - Combination Circuit Breaker, IEC Contactor Pump Starter, and Overload Relay with an Adjustable Pump Amp Range which Protects the Pumps from Overcurrent Damage or use MPSs for Pump Disconnect
- **Vibrant Multi-Color LEDs *(select indicators listed)***
  - Green (normal), Red (alarms), Blue (pump run), and Red/Yellow (error)
- **Automatic Resettable Alarm and Control Fuse**
- **Built-in Printed Circuit Board Surge Protection *(conformal coated)***
- **Easily Change Configurations**
  - Demand Dosing, Timed Dosing, Transducer Settings, Enable Pump Exerciser, and Seal Fail Alarm or Pump Shutdown
- **Sensor Options *(signaling device)***
  - Field Wire up to (5) Digital Inputs
  - Low Alarm/Redundant Off, Off, Lead, and Lag/High Alarm
  - Configure 5th Input for a 4-20mA Submersible Transducer (with 316 stainless steel cable hanger) or Digital Input for Auxiliary Switch, or (5) Float System to separate the Lag and High Alarm
- **Statistic Tracking *(each pump)***
  - Pump Elapsed Time, Min/Max/Avg Pump Run Times, Pump Cycle Counter, Total Gallons Pumped, High Level Stats, and More
- **Included Auxiliary "Dry" Contacts**
  - Pump 1 Run, Pump 2 Run, and General Alarm
  - Configurable Reverse Operated for General Alarm plus Power Loss
- **Hand-Off-Auto (HOA) Pump Selector Switch *(each pump)***
  - Off Reminder, Yellow Flashing LEDs and Displays "Pumps Disabled"
  - Configurable Pump Disable
- **Scroll Wheel and Digital Display *(password protected settings)***
  - Navigate Menu, Access Statistics Tracking, Configure Settings, and Displays System Information on OLED Screen
- **Exterior Test/Silence Switch**
  - Quick View of Pump and Alarm Stats
  - Check Alarm LEDs and Buzzer or Silence Buzzer during Alarm

ORDERING INFORMATION

Scan the QR code for more information on this product and website includes pricing.

FLEX™ - THREE PHASE | DUPLEX

Base Model	Control Panel Description
FLXC3D	FLEX™, Clear Door, Three Phase Duplex, 208/230/460VAC (460) or 230/460/575VAC (575)


Panel Code	Pump Full Load Amps (FLA)
CO1-1.6	1.0 - 1.6 Amps
CO1.6-2.5	1.6 - 2.5 Amps
CO2.5-4	2.5 - 4.0 Amps
CO4-6	4.0 - 6.0 Amps
CO6-10	6.0 - 10.0 Amps
CO9-14	9.0 - 14.0 Amps
CO13-18	13.0 - 18.0 Amps
CO17-23	17.0 - 23.0 Amps
CO20-25	20.0 - 25.0 Amps

Control Switch Options	Panel Code	Description (narrow angle models only)
Number of Control Switches	+2	(2) Control Switches *(with transducer)*
	+3	(3) Control Switches
	+4	(4) Control Switches
	+5	(5) Control Switches
Float Style	AG	Altra™ Gold Series
Activation Type *(Pump Down)*	H	High Level, Normally Open
Mounting Method (float attachment)	PS	Pipe Clamp, Stainless Steel
	WC	Cable Weight, Cast Iron
	WP	Cable Weight, Plastic
Cable Length (feet; standard)	20	20' Cable Length
	30	30' Cable Length
	50	50' Cable Length
	75	75' Cable Length
	100	100' Cable Length

***Example: FLXC3D460CO4-6+3AGHWP50** = FLEX™, Clear Door, Three Phase Duplex, 208/230/460VAC, 4-6A, (3) 50' Control Switches, Plastic Cable Weights*

FLEX™ Control Panel | PRODUCT DIMENSIONS and REMOTE MONITORING

Optionally connected to the Alderon™ cloud based Vizzy.Site™ for alarm and pump tracking statistics

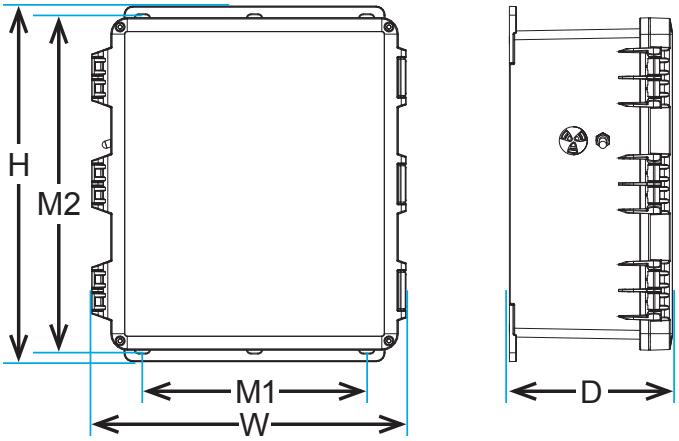

PANEL CODE (enclosure size)	OVERALL Width (W)	OVERALL Height (H)	OVERALL Depth (D)	MOUNTING Width (M1)	MOUNTING Height (M2)
Base Model (E3) *14 x 12 x 6*	14.01	15.85	7.27	10.24	14.83
E4 *16 x 14 x 8*	16.09	17.85	9.27	12.24	16.91
E5 *18 x 16 x 10*	18.16	19.85	11.27	14.25	18.99

Enclosure measurements (inches)


OPTIONAL - REMOTE MONITORING

Vizzy.Site™ | 3 WAYS to CONNECT

1 ***WIFI***
Panel is connected where the WiFi signal is available AT the panel location ~ Panel Code: V1

2 ***ZIGBEE WIRELESS to WIRELESS WIFI***
Panel is connected up to 1,000 feet *(line of sight)* AWAY FROM where a WiFi signal is available from the panel location ~ Panel Code: V2

3 ***VERIZON CELLULAR***
Panel is connected as long as a Verizon cellular signal is available at the panel location ~ Panel Code: V3 (USA) and V4 (Canada)

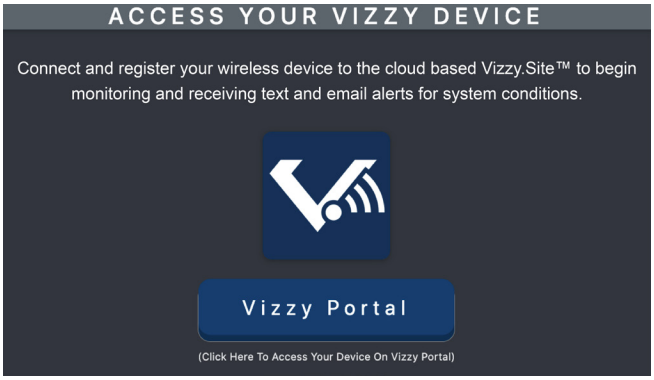


MONITOR YOUR SYSTEM ANYWHERE with a SMARTPHONE, TABLET, or COMPUTER


When the product is connected to the Alderon™ Vizzy.Site™ cloud for remote monitoring; view product information for the device, configuration, event history, stats, alert rules, and information. Each tab includes additional information and selections to change system settings or view alarm and pump statistics.

Statistic examples include: System Pumping, Pump Run Stats, Pump Auxiliary Cutoff, Pump Overcurrent, Pump Undercurrent, Pump Seal Sensor Alarm, High Water Alarm, and Low Water Alarm (duplex; separate stats per pump).

Example: Pump 1 Overcurrent

PRESS the 'Clear Resettable' button to "reset" statistic to zero.
NOTE: Lifetime statistic values are NOT resettable

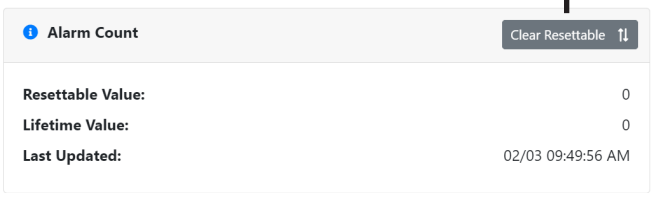

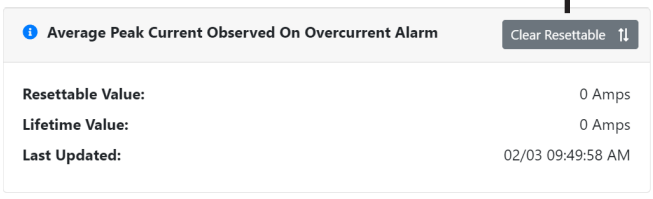

SUBSCRIPTIONS:

Options V1 and V2 | WiFi or Zigbee to WiFi

- VIZZY™ FREE - $0.00 | high or low level alarm monitoring only
- VIZZY™ PRO - $99.00/YEAR | full system monitoring of alarms and events, pump statistics, and more

Options V3 (USA) and V4 (Canada) | Cellular

- VIZZY™ PRO - $299.00/YEAR | full system monitoring of alarms and events, pump statistics, and more