
PN3571

Pressure sensor with display

PN-250-SEG14-MFRKG/US/ /V

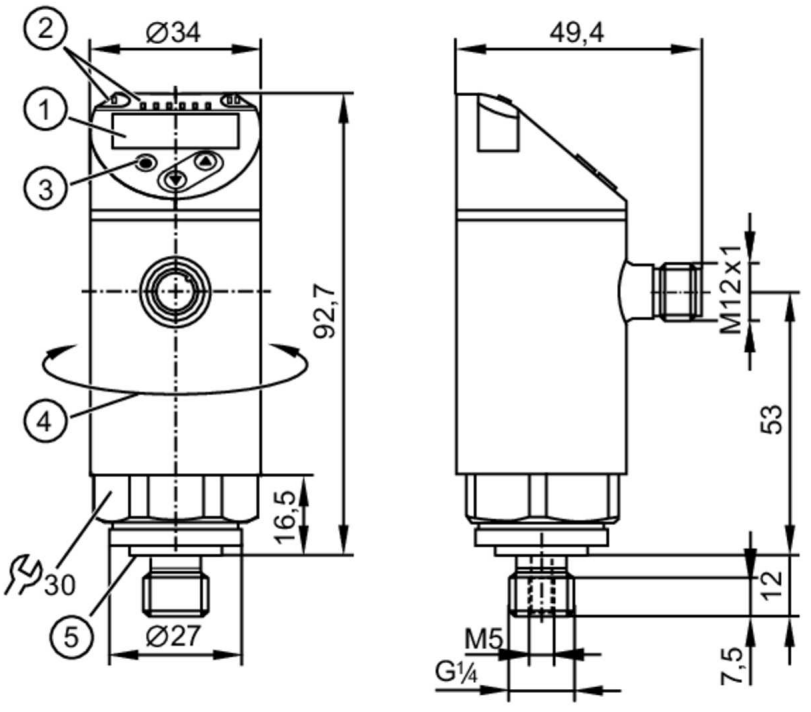

1 alphanumeric display 4-digit red/green
2 LEDs Display unit / Switching status
3 Programming button
4 upper part of the housing can be rotated 345°
5 sealing

Product characteristics			
Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1		
Measuring range	0...250 bar	0...3620 psi	0...25 MPa
Process connection	threaded connection G 1/4 external thread (DIN EN ISO 1179-2); Internal thread:M5		
Application			
System	gold-plated contacts		
Measuring element	metallic thin film cell		
Application	for industrial applications		
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Min. bursting pressure	1200 bar	17400 psi	120 MPa
Pressure rating	500 bar	7250 psi	50 MPa
Vacuum resistance [mbar]	-1000		
Type of pressure	relative pressure		
Electrical data			
Operating voltage [V]	18...30 DC; (to SELV/PELV)		
Current consumption [mA]	< 35		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		

PN3571

Pressure sensor with display

PN-250-SEG14-MFRKG/US/ /V

Power-on delay time	[s]	0.3		
Integrated watchdog		yes		
Inputs / outputs				
Number of inputs and outputs		Number of digital outputs: 1; Number of analog outputs: 1		
Outputs				
Total number of outputs		2		
Output signal		switching signal; analog signal; IO-Link; (configurable)		
Electrical design		PNP		
Number of digital outputs		1		
Output function		normally open / closed; (configurable)		
Max. voltage drop switching output DC	[V]	2.5		
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C) 250 (...40 °C))		
Switching frequency DC	[Hz]	< 170		
Number of analog outputs		1		
Analog current output	[mA]	4...20		
Max. load	[Ω]	500		
Analog voltage output	[V]	0...10		
Min. load resistance	[Ω]	2000		
Short-circuit protection		yes		
Type of short-circuit protection		yes (non-latching)		
Overload protection		yes		
Measuring/setting range				
Measuring range		0...250 bar	0...3620 psi	0...25 MPa
Factory setting / CMPT = 2				
Set point SP		2...250 bar	40...3620 psi	0.2...25 MPa
Reset point rP		1...249 bar	20...3600 psi	0.1...24.9 MPa
Min. difference between SP and rP		2 bar	20 psi	0.2 MPa
In steps of		1 bar	20 psi	0.1 MPa
Status_B High Resolution / CMPT = 3				
Set point SP		2...250 bar	30...3626 psi	0.2...25 MPa
Reset point rP		1...249 bar	12...3608 psi	0.1...24.9 MPa
Min. difference between SP and rP		2 bar	19 psi	0.2 MPa
In steps of		1 bar	1 psi	0.1 MPa
Accuracy / deviations				
Switch point accuracy	[% of the span]	< ± 0,5		
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)		
Characteristics deviation	[% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)		
Hysteresis deviation	[% of the span]	< ± 0,25		

PN3571

Pressure sensor with display

PN-250-SEG14-MFRKG/US/ /V

Long-term stability [% of the span]		< ± 0,05; (per 6 months)
Temperature coefficient zero point [% of the span / 10 K]		0,2; (-25...80 °C)
Temperature coefficient span [% of the span / 10 K]		0,2; (-25...80 °C)
Reaction times		
Response time	[ms]	< 3
Delay time programmable dS, dr	[s]	0...50
Damping process value dAP	[s]	0...4
Damping for the analog output dAA	[s]	0...4
Max. response time analog output	[ms]	3
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; switch-on/ switch-off delay; Damping; Display unit; current/voltage output
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
SIO mode		yes
Required master port class		A
Process data analog		1
Process data binary		1
Supported DeviceIDs		**Type of operation** / **DeviceID** Factory setting / CMPT = 2 / 428 Status_B High Resolution / CMPT = 3 / 607
Note		For further information please see the IODD PDF file at "Downloads"
Factory setting / CMPT = 2		
Profiles		Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis
Min. process cycle time	[ms]	2.3
IO-Link resolution pressure	[bar]	1
IO-Link resolution pressure	[MPa]	0.1
IO-Link process data (cyclical)		**Function** / **bit length** pressure / 14 binary switching information / 1
IO-Link functions (acyclical)		application specific tag
Status_B High Resolution / CMPT = 3		
Profiles		Smart Sensor ED2: Digital Measuring Sensor (0x000A), Identification and Diagnosis (0x4000)
Min. process cycle time	[ms]	3
IO-Link resolution pressure	[bar]	0.1

PN3571

Pressure sensor with display

PN-250-SEG14-MFRKG/US/ /V

IO-Link resolution pressure	[MPa]	0.01	
IO-Link process data (cyclical)		**Function**	**bit length**
		pressure	16
		device status	4
		binary switching information	1
IO-Link functions (acyclical)		application specific tag	

Operating conditions			
Ambient temperature	[°C]	-25...80	
Storage temperature	[°C]	-40...100	
Protection		IP 65; IP 67	

Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	190	
UL approval		UL approval number	J006
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	


Mechanical data		
Weight	[g]	259
Material		1.4542 (17-4 PH / 630); stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC
Materials (wetted parts)		1.4542 (17-4 PH / 630)
Min. pressure cycles		100 million
Tightening torque	[Nm]	25...35; (recommended tightening torque; Depends on lubrication, seal and pressure rating)
Process connection		threaded connection G 1/4 external thread (DIN EN ISO 1179-2); Internal thread:M5
Process connection sealing		FKM (DIN EN ISO 1179-2)
Restrictor element integrated		no (can be retrofitted)

Displays / operating elements		
Display	Display unit	3 x LED, green (bar, psi, MPa)
	Switching status	1 x LED, yellow
	Measured values	alphanumeric display, red/green 4-digit

Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated




PN3571

Pressure sensor with display

PN-250-SEG14-MFRKG/US/ /V

Connection

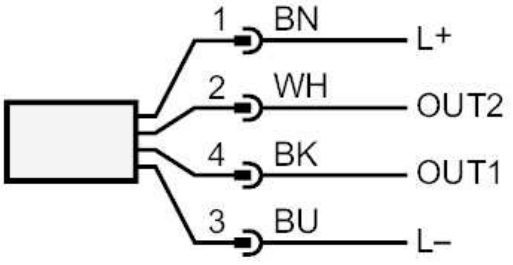

OUT1	Switching output IO-Link
OUT2	analog output
	Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white