LEGEND
PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

## SUBMITTAL SHEET

| | |
|---|---|
| JOB NAME | ITEM TAG |
| JOB LOCATION | PART NUMBER |
| CONTRACTOR | DATE |
| ENGINEER APPROVAL | DATE |

# NO LEAD QUARTER-TURN BALL-TYPE CHROME SUPPLY STOP

## T-596NL

Quarter-turn, self-cleaning ball valve design resists mineral and scale build-up, assuring positive shutoff and re-opening.

The ball-seat operation and dual O-ring stem seal features, out-perform traditional multi-turn stop designs.

Compact, forged brass, chrome plated or polished brass bodies are both durable and decorative.

An ideal upgrade replacement for warn, leaking stops that won't close completely.

End connection types include: Sweat, FNPT, Compression, Push-to-Connect, CPVC, F1960 & F1807.

**Working Pressure, Non-Shock (PSI)**

Cold Working Pressure (CWP): 125 psi

Maximum Service Temperature: 180°F*

**Temperatures above 120°F increase the risk of scalding. Consult local code for temperature requirements.*

**MATERIAL SPECIFICATION**

| PART | MATERIAL |
|---|---|
| Body | Chrome Plated Lead Free Brass |
| Ball | Chrome Plated Lead Free Brass |
| Ball seats | EPDM |
| Stem | Lead Free Brass |
| Stem O-Rings | NBR |
| Handle | Chrome Plated ABS |
| Handle Screw | Plated Carbon Steel |
| Compression Nut | Chrome Plated Brass |
| Compression Ferrule | Brass |

**Certifications/Listings:**
Third-Party certified.
NSF/ANSI 14: Plastic piping system components and
(Models with PEX/PE-RT Connections)
NSF/ANSI 61: Drinking water system components health effects.

**Standards:**
ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch.
ANSI/ASME B16.22: Wrought copper and copper alloy solder-joint pressure fittings.
ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.
ASTM F1960: Cold expansion fittings with PEX reinforcing rings.
ASSE 1061: Performance requirements for push-fit fitting.
ASTM D2846: Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Hot and Cold Water Distribution Systems.



**Pictured:**
T-596NL
OD x OD



**Pictured:**
T-596NL
Sweat x OD



**Pictured:**
T-596NL
FNPT x OD



**Pictured:**
T-596NL
CPVC x OD



**Pictured:**
T-596NL
F1960 x OD



**Pictured:**
T-596NL Insta-Loc II
F1807 x OD




**Pictured:**
T-596NL
F1807 x F1807




**Pictured:**
T-596NL Insta-Loc II
Push x OD

*See Diagrams/Cut-Aways on Page 2*

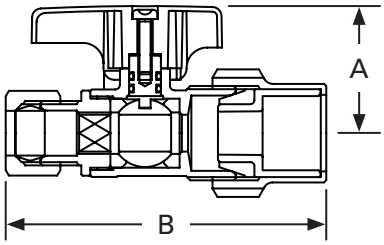
| DIMENSIONS | T-596NL Straight | |
|---|---|---|
| **Size** | **A** | **B** |
| 3/8" FNPT x 3/8" OD | 1.10 | 2.01 |
| 1/2" FNPT x 3/8" OD | 1.10 | 2.17 |
| 5/8" OD x 3/8" OD* | 1.10 | 2.44 |
| 1/2" CPVC x 3/8" OD | 1.10 | 2.76 |
| 1/2" PEX (F1807) x 3/8" OD | 1.10 | 2.24 |
| 1/2" PEX (F1807) x 1/2" PEX (F1807) | 1.10 | 2.24 |
| 1/2" PEX (F1960) x 3/8" OD | 1.10 | 2.36 |
| 1/2" SWT x 3/8" OD | 1.10 | 2.40 |
| 1/2" Push-Fit x 3/8" OD (Non-Removable) | 1.10 | 2.62 |
| 1/2" Push-Fit x 3/8" OD (Removable) | 1.14 | 2.65 |
| *Available in Polished Brass | | |
| **Icemaker Valves** | | |
| 5/8" OD x 1/4" OD | 1.10 | 2.37 |
| 1/2" PEX (F1807) x 3/8" OD | 1.10 | 2.17 |
| 1/2" PEX (F1960) x 1/4" OD | 1.10 | 2.28 |
| 1/2" Push-Fit x 1/4" OD (Non-Removable) | 1.10 | 2.54 |
| 1/2" Push-Fit x 1/4" OD (Removable) | 1.14 | 2.65 |



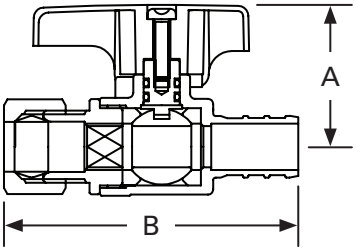

**Pictured:**
**T-595NL**
FNPT x OD
Cut-Away



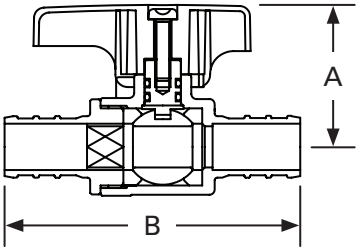

**Pictured:**
**T-595NL**
OD x OD
Cut-Away



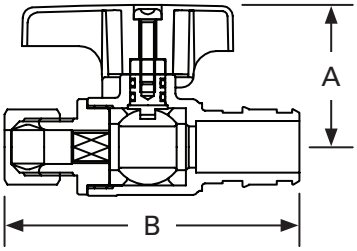

**Pictured:**
**T-595NL**
CPVC x OD
Cut-Away



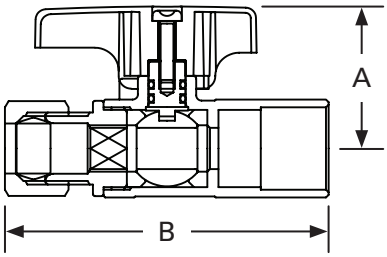

**Pictured:**
**T-595NL**
F1807 x OD
Cut-Away



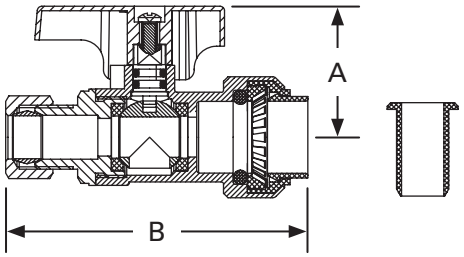

**Pictured:**
**T-595NL**
F1807 x F1807
Cut-Away




**Pictured:**
**T-595NL**
F1960 x OD
Cut-Away




**Pictured:**
**T-595NL**
Sweat x OD
Cut-Away




**Pictured:**
**T-595NL Insta-Loc II**
Push x OD
Cut-Away