LEGEND
PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

# SUBMITTAL SHEET

JOB NAME | ITEM TAG

JOB LOCATION | PART NUMBER

CONTRACTOR | DATE

ENGINEER APPROVAL | DATE

# ANTI-SWEAT TOILET TANK VALVES

## Model T-20 / T-20A

- 180$^0$f maximum service temp
- Model T-20 is factory set at 30% hot,70% cold mix
- Model T-20a adjustable down from 30% hot to 0% (100% cold)
- All connections are combination 1/2" mip or 1/2" solder
- Compression nuts and ferrules are available

**Working Pressure, Non Shock (PSI)**
Cold working pressure (CWP): 125 CWP
Saturated steam (WSP): N/A



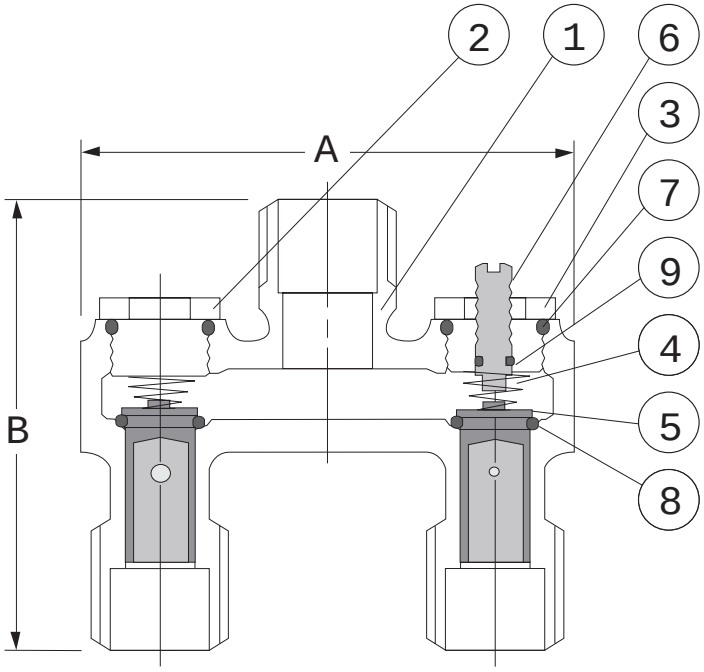

*Pictured*
**Model T-20A**

### MATERIAL SPECIFICATION

| | PART | MATERIAL | SPECIFICATIONS |
|---|---|---|---|
| 1 | Body | Bronze | B584 C84400 |
| 2 | Cold plug | Brass | B16 C36000 |
| 3 | Hot plug | Brass | B16 C36000 |
| 4 | Spring | 304 Stainless steel | |
| 5 | Regulating cartridge | Brass | B16 C36000 |
| 6 | Adjustment screw | Brass | B16 C36000 |
| 7 | Plug o-rings (2) | NBR (BUNA-N) rubber | FN 80 |
| 8 | Cartridge o-rings (2) | NBR (BUNA-N) rubber | FN 80 |
| 9 | Adjustment screw o-ring | NBR (BUNA-N) rubber | FN 80 |

### DIMENSIONS

| Size | A | B |
|---|---|---|
| T-20 | 2.99 | 2.72 |
| T-20A | 2.99 | 2.72 |




*Pictured*
**Model T-20A**
Cut-away