CAM INOX

ELETTROPOMPE AUTOADESCANTI JET INOX


APPLICAZIONI

Elettropompe autoadescanti Jet Inox garantiscono un 'ottima resa idraulica e una notevole capacità di pressione. Possono aspirare fino a 8 mt. di profondità e sono in grado di funzionare perfettamente anche in presenza di acque miscelate a gas. Adatte per l'alimentazione di acqua potabile, il sollevamento e la distribuzione negli impianti domestici a mezzo di piccoli e medi serbatoi (autoclavi).

APPLICATION

Selfpriming jet water pumps with a very high hydraulic performance and a considerable pressure capacity. Able to pump up to mt. 8 depth and work perfectly even in gas mixed water. Suitable for drinkable water, water lifting and distribution in domestic fittings by small and medium sized tanks.







GIRANTE - *IMPELLER*

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C
  (per un uso domestico secondo EN 60335-2-41)
  Temperatura max. liquido: 35°C (per altri impieghi)
- Temperatura ambiente fino a 40° C
- Altezza d'aspirazione manometrica fino a 8 mt.
- Servizio continuo

OPERATING CONDITIONS

- *Liquid temperature up to 35°C*
  (for home use according to EN 60335-2-41)
  Max. liquid temperature: 35°C (for other uses)
- *Ambient temperature up to 40°C*
- *Total suction lift up to 8 mt.*
- *Continuous duty*

MOTORE

- Monofase 230V-50Hz
- Trifase 230/400V-50Hz
- Motore elettrico ad induzione a 2 poli (n = 2850 min^{-1})
- Isolamento Classe F
- Protezione IP 44

MOTOR

- *Single-phase 230V-50Hz*
- *Three-phase 230/400V-50Hz*
- *Two-Pole induction motor (n = 2850 min^{-1})*
- *Insulation Class F*
- *Protection IP 44*

MATERIALI


- Corpo pompa	Acciaio Inox AISI 304
- Supporto motore	Alluminio
- Girante	Acciaio Inox AISI 304
- Diffusore	Noryl
- Flangia portatenuta	Acciaio Inox AISI 304
- Albero motore	Acciaio Inox AISI 304
- Tenute meccaniche	Ceramica/Grafite/NBR

MATERIALS


- *Pump body*	*Stainless Steel AISI 304*
- *Motor Support*	*Aluminium*
- *Impeller*	*Stainless Steel AISI 304*
- *Diffuser*	*Noryl*
- *Pump flange*	*Stainless Steel AISI 304*
- *Shaft with rotor*	*Stainless Steel AISI 304*
- *Mechanical seal*	*Ceramic/Graphite/NBR*

© Speroni S.p.A., Castelnovo di Sotto (Reggio Emilia), 2024

SELFPRIMING JET INOX PUMPS

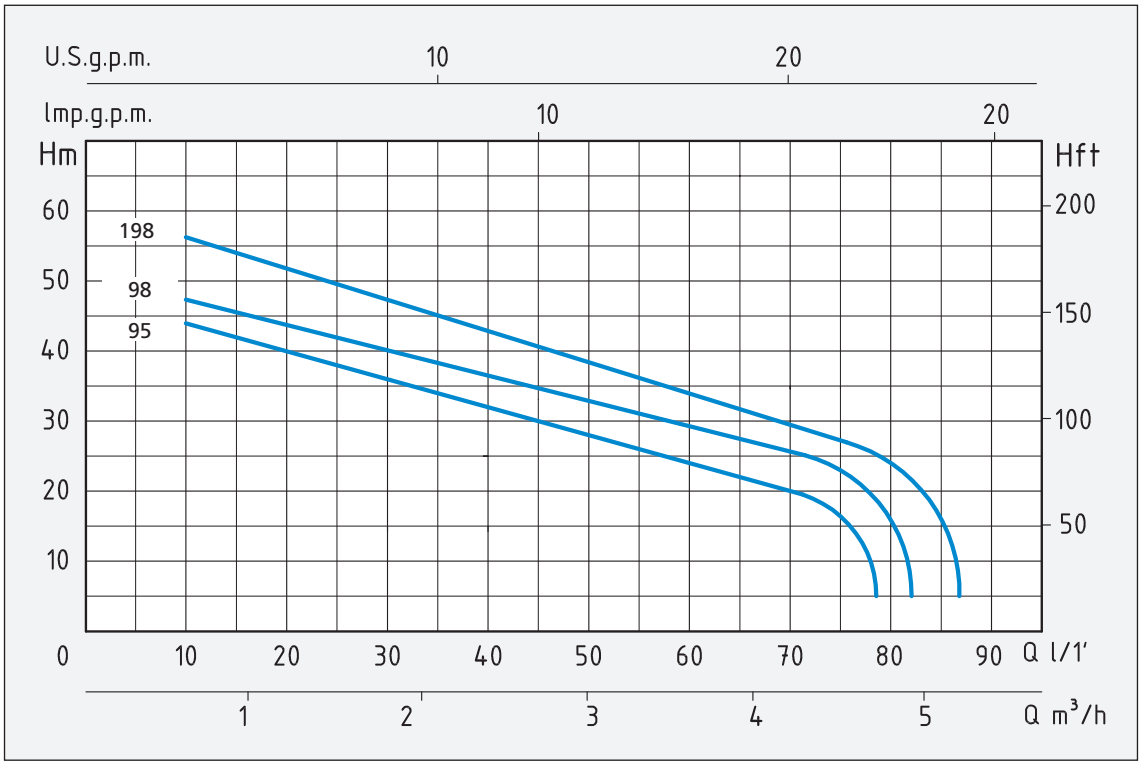

TIPO *TYPE*		POTENZA NOMINALE *NOMINAL POWER*		POTENZA ASSORBITA *INPUT POWER*	AMPERE		Q = PORTATA - *CAPACITY*										
Monofase *Single-phase*	Trifase *Three-phase*	P2		P1	Monofase *Single-phase*	Trifase *Three-phase*	m³/h	0,6	0,9	1,2	1,5	1,8	2,4	3	3,6	4,2	4,8
		HP	kW	kW			lt/1'	10	15	20	25	30	40	50	60	70	80
							Prevalenza manometrica totale in m.C.A. - *Total head in meters w.c.*										
CAM 95		1	0,75	1,1	5		H (m)	44	40	38	36	34	30	27	24	20	
CAM 98		1,3	1	1,3	5,8			47	45	44	41	39	35	32	28	26	
CAM 198	CA 198	1,6	1,1	1,7	7,5	4,2		56	53	50	48	46	42	36	34	30	25

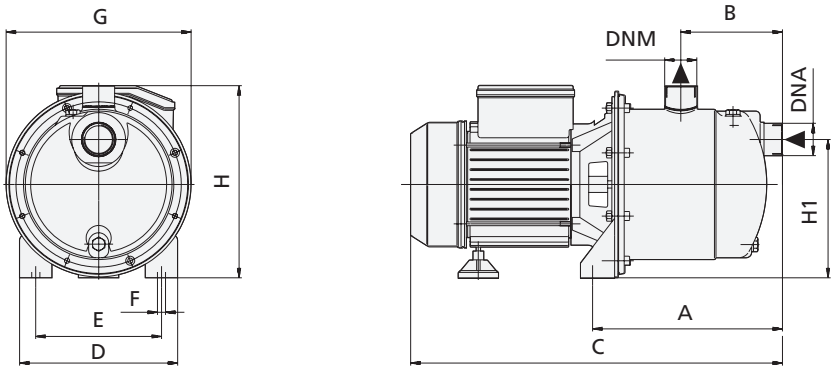

TIPO *TYPE*		DIMENSIONI mm - *DIMENSIONS mm*											DIMENSIONI *DIMENSIONS* mm			PESO *WEIGHT*
Monofase *Single-phase*	Trifase *Three-phase*	A	B	C	D	E	F	G	H	H1	DNA	DNM	P	L	H	Kg
CAM 95		210	113	415	176	140	9	206	212	154	1"	1"	212	453	230	10,8
CAM 98		210	113	415	176	140	9	206	212	154	1"	1"	212	453	230	11,4
CAM 198	CA 198	210	113	432	176	140	9	206	230	154	1" ¼	1"	235	490	295	14,4