
# Vizzynotifier™

**11 Input, Type 4X (Indoor/Outdoor)**
**Model: VNC1100 | 120/240VAC**
**CLEAR DOOR and LOCKABLE LATCHES**

Alderon™ INDUSTRIES

MARKETING DATA FLIER

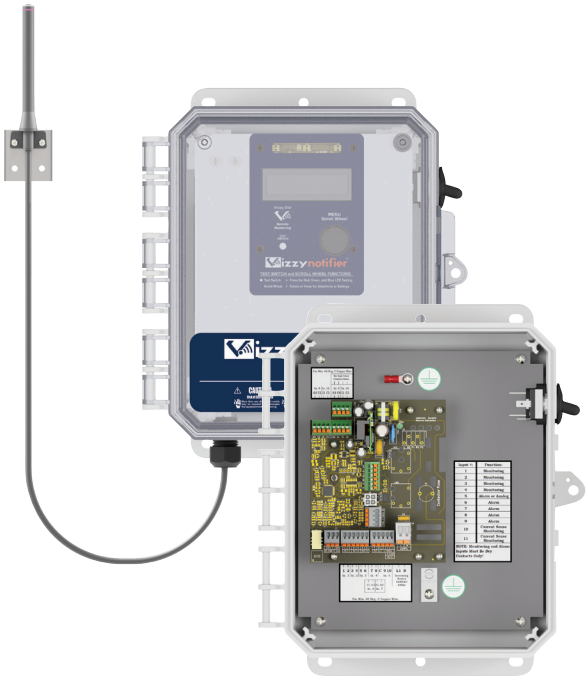

## STANDARD FEATURES

- **Type 4X Enclosure, Indoor or Outdoor, Pad-lockable**
  - Standard Enclosure Size 10" x 8" x 6" (inches)
  - Clear Door
  - Inner Door, View OLED Screen with Alarm and Status Indicator LEDs
  - Alarm Buzzer and Alarm Test/Silence Switch
- **Vibrant Multi-Color LEDs *(select indicators listed)***
  - Green (normal), Red (alarms), and Red/Yellow (error)
- **Inputs**
  - 8 Dry Contact Monitoring – Normally Open or Normally Closed
  - 1 Analog Input – 4-20mA or Dry Contact Monitoring
  - 2 Amperage Meter Inputs (both track Counts and Total Elapsed Time) – Must select current sensor option
- **Statistic Tracking**
  - Tracks Counts and Total Elapsed Time
- **Scroll Wheel and Digital Display *(password protected settings)***
  - Navigate Menu, Access Statistics Tracking, Configure Settings, and Displays System Information on OLED Screen
- **Test/Silence Switch**
  - Quick View Alarm Stats
  - Check Alarm LEDs or Silence Buzzer during Alarm

### Subscription

- WiFi - $99 per year
- Verizon Cellular - $299 per year

## REMOTE MONITORING

***MONITOR YOUR SYSTEM ANYWHERE with a SMARTPHONE, TABLET, or COMPUTER***

When the product is connected to the Alderon™ Vizzy.Site™ cloud for remote monitoring; view product information for the device, configuration, event history, stats, alert rules, and information. Each tab includes additional information and selections to change system settings or view alarm and pump statistics.

Statistic examples include: System Pumping, Pump Run Stats, Pump Auxiliary Cutoff, Pump Overcurrent, Pump Undercurrent, Pump Seal Sensor Alarm, High Water Alarm, and Low Water Alarm.

### Example: *Count / Elapsed Time*

| Pump Run Count | Clear Resettable |
|---|---|
| Resettable Value: | 12 |
| Lifetime Value: | 27 |
| Last Updated: | 03/20 10:03:29 AM |

| Pump Run Elapsed Time | Clear Resettable |
|---|---|
| Resettable Value: | 57 Minutes and 30 Seconds |
| Lifetime Value: | 57 Minutes and 30 Seconds |
| Last Updated: | 03/20 10:03:30 AM |

*PRESS the 'Clear Resettable' button to "reset" statistic to zero.*

*NOTE: Lifetime statistic values are NOT resettable*


## ORDERING INFORMATION

Scan the QR code for more information on this product and website includes pricing.

**VIZZYNOTIFIER™ - 11 INPUT**

| Base Model | Description | | |
|---|---|---|---|
| VNX1100 | Vizzynotifier™ - 11 Input, Clear Door, 120/240VAC | | |
| **Enclosure Type** | | **Panel Code** | **Connectivity** |
| VNC1100 - Clear | | V1 | WiFi |
| | | V2 | Zigbee to WiFi |
| | | V3 | Verizon Cellular - USA |
| | | V4 | Verizon Cellular - Canada |

***Example: VNC1100-V3** = Clear Door with LED Alarm Indication and Verizon Cellular - USA*

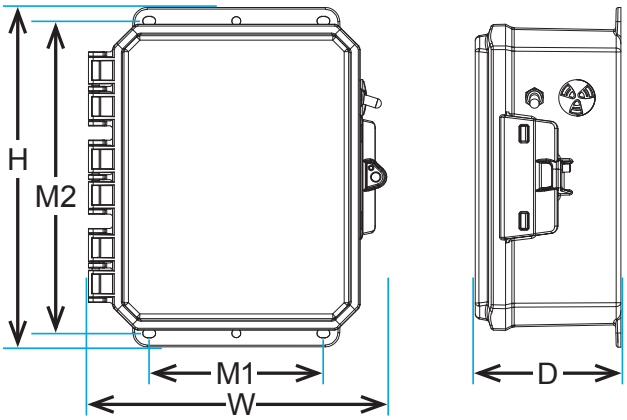


| ENCLOSURE SIZE | OVERALL Width (W) | OVERALL Height (H) | OVERALL Depth (D) | MOUNTING Width (M1) | MOUNTING Height (M2) |
|---|---|---|---|---|---|
| *10 x 8 x 4* | 10.27 | 11.69 | 5.01 | 6.13 | 10.75 |
| Enclosure measurements (inches) | | | | | |

## Panel Code: V1 Option - WIFI

### *Vizzynotifier™ Control Panel Hardware and Antenna*

*WiFi present at the panel and connects to Vizzy.Site™*

- The control panel is mounted indoors or outdoors where a WiFi signal is present at the panel location.





## Panel Code: V2 Option - ZIGBEE RADIO

### *Vizzynotifier™ Control Panel Hardware and Antenna*

*WiFi present at the indoor Vizzyhub™ and Zigbee to Wireless WiFi connects to Vizzy.Site™*
*The Vizzyhub™ indoor alarm panel and antenna (part number 2010519) are included with the panel*

- The control panels with Zigbee (up to 8) are mounted indoors or outdoors and can be connected in a mesh network up to 1,000 feet (line of sight) apart from each other. The indoor Vizzyhub™ (2010519) with antenna must be located where a WiFi signal is present in a building or other indoor location.

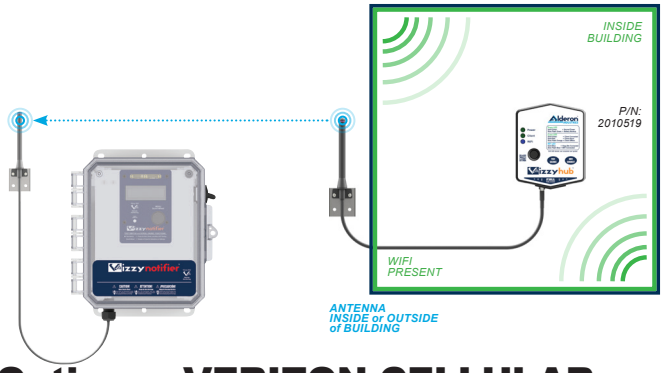


## Panel Code: V3 (USA) and V4 (Canada) Options - VERIZON CELLULAR

### *Vizzynotifier™ Control Panel Hardware and Antenna*

*Verizon Cellular present at the panel and connects to Vizzy.Site™*

- The control panel is mounted indoors or outdoors where a Verizon cellular signal is present at the panel location.

